
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

RITUS 35 TRIM



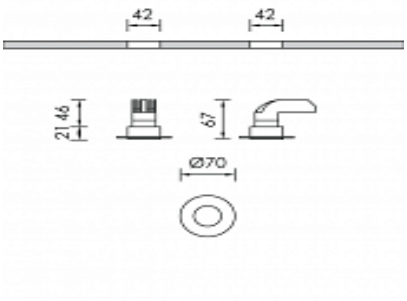

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL1463CL001DAC
Product family	RITUS
Diffuser	
Control Gear	Remote Electronic Driver
Height	67
Diameter	70


Electrical data

Consumption	9
Performance	63.89
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	M
Beam	36º
Luminous Flux	575
CRI CCT	927

Light distribution

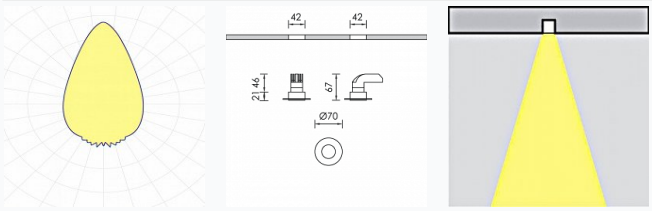

Safety characteristics

IK	04
IP	54
Protection Class	Class III

Temperature Operating Conditions

Lifetime	20.000h
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%