
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

MAX ARTUS H.P.LED



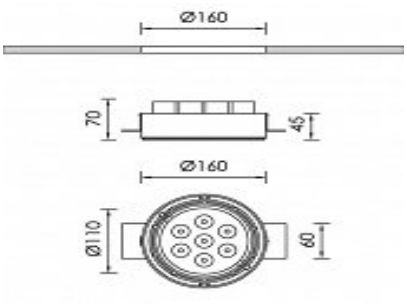

CE LM80 LM79 TM21 REACH CE LM8

TM21 REACH Source Type H.P. LED

Product Details

General Information

Housing	Aluminium
Product code	DL1765CL001ON
Product family	ARTUS
Diffuser	Clear Polycarbonate
Control Gear	Remote Electronic Driver
Height	70
Diameter	160


Electrical data


Consumption	7,8
Performance	122
Ripple	3
Power Factor	0.96
Nominal Voltage	21


Luminaire Output

Beam Type	W
Beam	45º
Luminous Flux	854
CRI CCT	940
Glare Indicator Ugr Longwise Optics	15
Glare Indicator Ugr Parallel Optics	15

Light distribution







Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%