
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

MAX ARTUS SQUARE H.P.LED



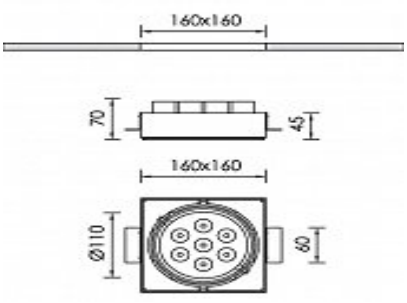

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	DL1833CL003DAC
Product family	ARTUS
Diffuser	
Control Gear	Remote Electronic Driver
Width	160
Length	160
Height	70


Electrical data


Consumption	7,8
Performance	103.33
Ripple	3
Power Factor	0.96
Nominal Voltage	34.6


Luminaire Output

Beam Type	N
Beam	25º
Luminous Flux	775
CRI CCT	930

Light distribution







Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%