
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

MOBILIS SH LED



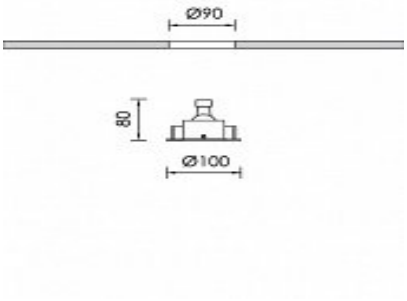

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL1985CL003
Product family	MOBILIS
Diffuser	
Control Gear	
Height	80
Diameter	100


Electrical data


Consumption	6,7
Performance	109.1
Ripple	3
Power Factor	0.96
Nominal Voltage	34.6


Luminaire Output

Beam Type	N
Beam	18º
Luminous Flux	731
CRI CCT	930
Glare Indicator Ugr Longwise Optics	17
Glare Indicator Ugr Parallel Optics	17

Light distribution







Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%