
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

MAX MOBILIS HP LED



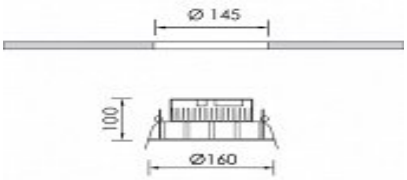

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	DL2178CL001DAC
Product family	MAX MOBILIS
Diffuser	
Control Gear	Remote Electronic Driver
Height	100
Diameter	160


Electrical data


Consumption	7,5
Performance	110.93
Ripple	3
Power Factor	0.96
Nominal Voltage	21


Luminaire Output

Beam Type	NM
Beam	25º
Luminous Flux	776.5
CRI CCT	930
Glare Indicator Ugr Longwise Optics	11
Glare Indicator Ugr Parallel Optics	11

Light distribution







Safety characteristics

IK	04
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%