
MAX MOBILIS HP LED



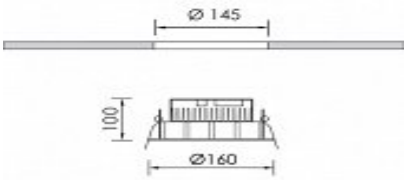

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	DL2182CL002DAC
Product family	MAX MOBILIS
Diffuser	
Control Gear	Remote Electronic Driver
Height	100
Diameter	160


Electrical data

Consumption	7,8
Performance	103.33
Ripple	3
Power Factor	0.96
Nominal Voltage	21

Luminaire Output

Beam Type	W
Beam	45º
Luminous Flux	775
CRI CCT	930
Glare Indicator Ugr Longwise Optics	14
Glare Indicator Ugr Parallel Optics	14

Light distribution

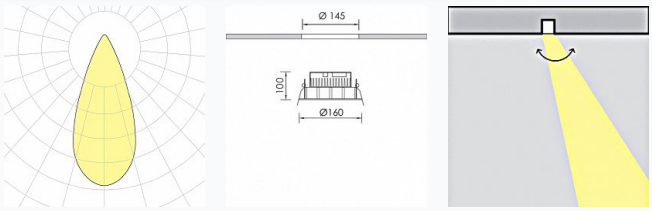

Safety characteristics

IK	04
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%