
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

FLUXUS L-T LED



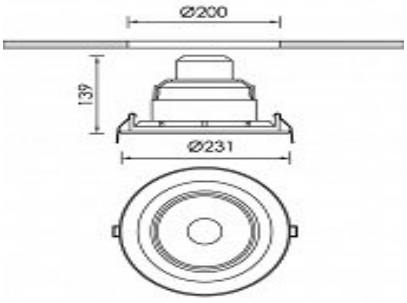

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL2362CL001DAC
Product family	FLUXUS
Diffuser	
Control Gear	Built-in ECG
Height	195
Diameter	231


Electrical data

Consumption	22,7
Performance	87.57
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	XW
Beam	86º
Luminous Flux	1926.5
CRI CCT	930

Light distribution

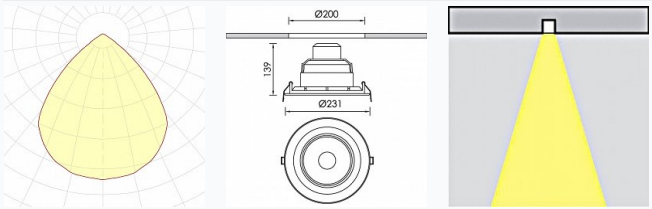

Safety characteristics

IK	04
IP	20
Protection Class	Class II

Temperature Operating Conditions

Lifetime	50.000h L70B50@25°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%