
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

CERAM 4S 2F H.P.LED



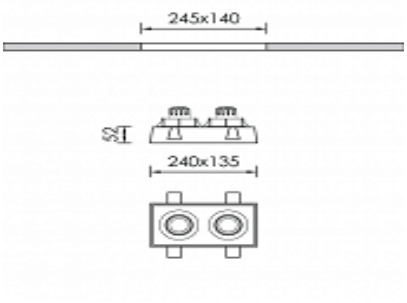

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Γύψος, Αλουμίνιο
Product code	DL2526CL001
Product family	CERAM
Diffuser	
Control Gear	
Width	135
Length	240
Height	52


Electrical data


Consumption	9,8
Performance	92.96
Ripple	3
Power Factor	0.96


Luminaire Output

Beam Type	NM
Beam	25º
Luminous Flux	911
CRI CCT	930
Glare Indicator Ugr Longwise Optics	16
Glare Indicator Ugr Parallel Optics	16

Light distribution







Safety characteristics

IK	02
IP	20

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%