
MINI FIXUS H.P.LED

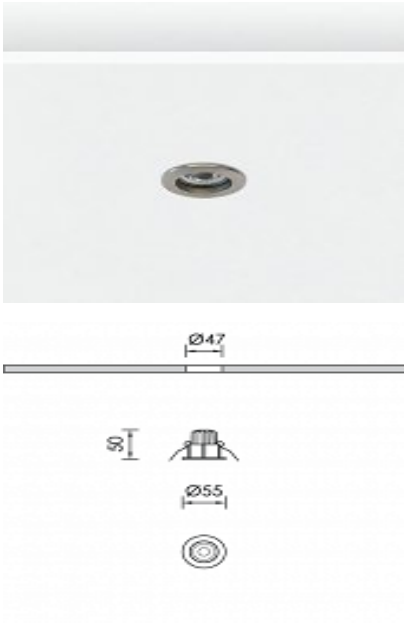

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	DL2804CL002DAC
Product family	FIXUS
Diffuser	
Control Gear	Remote Electronic Driver
Height	50
Diameter	55


Electrical data

Consumption	1,1
Performance	118.64
Ripple	3
Power Factor	0.96
Nominal Voltage	3

Luminaire Output

Beam Type	NM
Beam	25º
Luminous Flux	130.5
CRI CCT	940
Glare Indicator Ugr Longwise Optics	17
Glare Indicator Ugr Parallel Optics	17

Light distribution

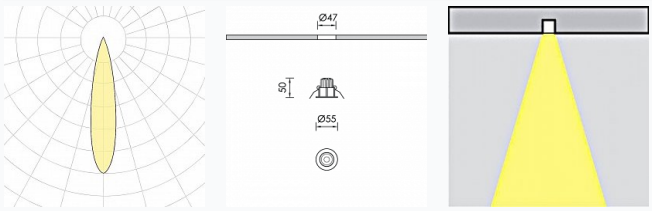

Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%