
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

MINI FIXUS H.P.LED

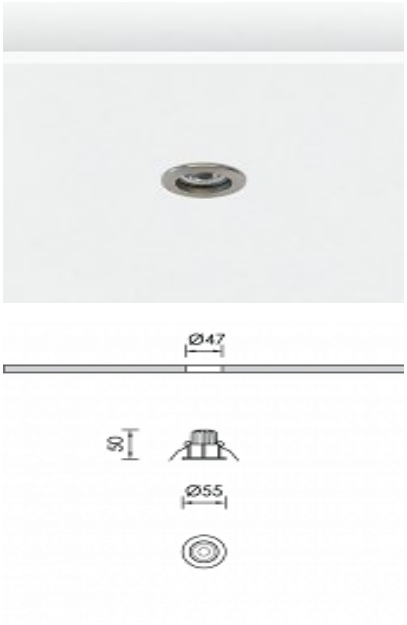

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	DL2806CL001DA
Product family	FIXUS
Diffuser	
Control Gear	Remote Electronic Driver
Height	50
Diameter	55


Electrical data

Consumption	1,1
Performance	104.09
Ripple	3
Power Factor	0.96
Nominal Voltage	3

Luminaire Output

Beam Type	W
Beam	45º
Luminous Flux	114.5
CRI CCT	927
Glare Indicator Ugr Longwise Optics	20
Glare Indicator Ugr Parallel Optics	20

Light distribution

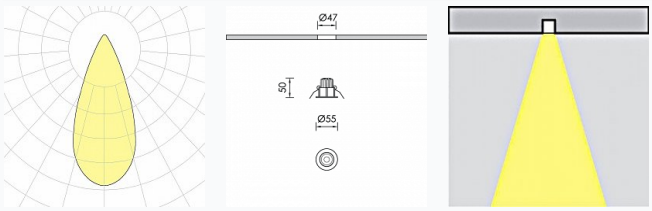

Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%