
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

STATUR SMALL 24



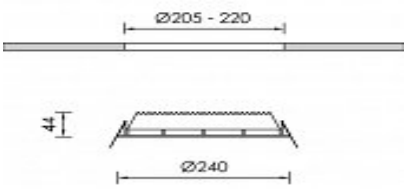

Product Details

CE LM80 LM79 TM21 REACH Source Type SMD LED

General Information

Housing	Aluminium
Product code	DL2850CL001DAC
Product family	STATUR
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Height	44
Diameter	240


Electrical data

Consumption	16,2
Performance	107.06
Ripple	3
Power Factor	0.96
Nominal Voltage	36.2

Luminaire Output

Beam Type	VW
Beam	118º
Luminous Flux	1713
CRI CCT	930

Light distribution

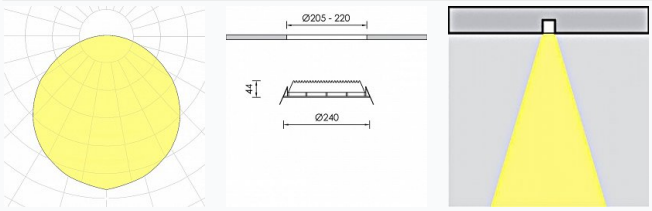

Safety characteristics

IK	04
IP	54
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%