
VIGOR IN M

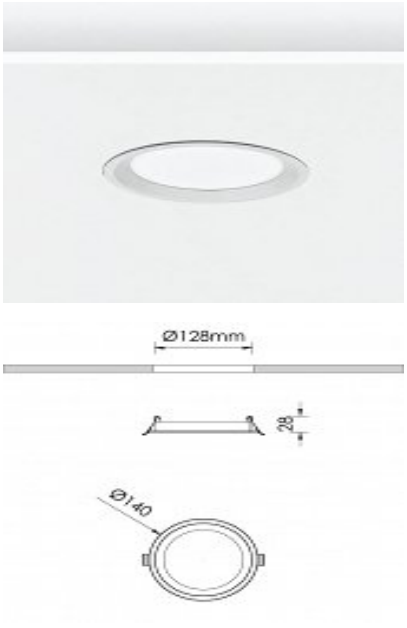

Product Details

CE LM80 LM79 TM21 REACH

Source Type SMD LED

General Information

Housing	Aluminium
Product code	DL2860CL001DAC
Product family	VIGOR
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Height	28
Diameter	140


Electrical data

Consumption	10
Performance	85
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	VW
Beam	115º
Luminous Flux	850
CRI CCT	930
Glare Indicator Ugr Longwise Optics	29
Glare Indicator Ugr Parallel Optics	29

Light distribution

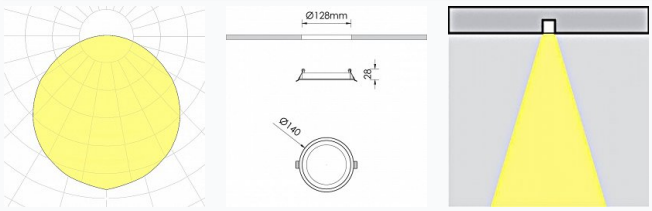

Safety characteristics

IK	04
IP	20
Protection Class	Class II

Temperature Operating Conditions

Lifetime	20.000h
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%