
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VIGOR IN XL



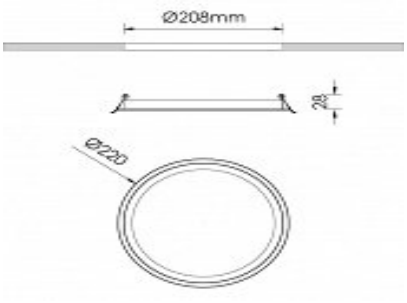

Product Details

CE LM80 LM79 TM21 REACH

Source Type SMD LED

General Information

Housing	Aluminium
Product code	DL2862CL001DA
Product family	VIGOR
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Height	28
Diameter	220


Electrical data


Consumption	21
Performance	84.52
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	VW
Beam	115º
Luminous Flux	1775
CRI CCT	930
Glare Indicator Ugr Longwise Optics	28
Glare Indicator Ugr Parallel Optics	28

Light distribution







Safety characteristics

IK	04
IP	20
Protection Class	Class II

Temperature Operating Conditions

Lifetime	20.000h
Operating Ambient Temperature	-10…+45°C
Operating Humidity Level	5…95%