
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

# NOVUS IN BOX 1x H.P.LED



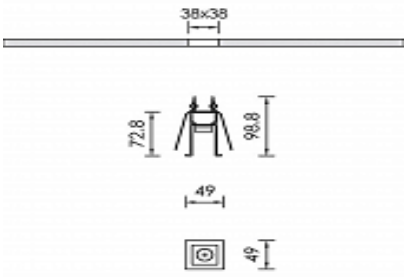


## Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | DL2864CL001DA |
| Product family | NOVUS |
| Diffuser | |
| Control Gear | Remote Electronic Driver |
| Width | 49 |
| Length | 49 |
| Height | 98.8 |


### Electrical data

| | |
|---|---|
| Consumption | 1,1 |
| Performance | 98.18 |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 3 |

### Luminaire Output

| | |
|---|---|
| Beam Type | UN |
| Beam | 8º |
| Luminous Flux | 108 |
| CRI CCT | 927 |

### Light distribution

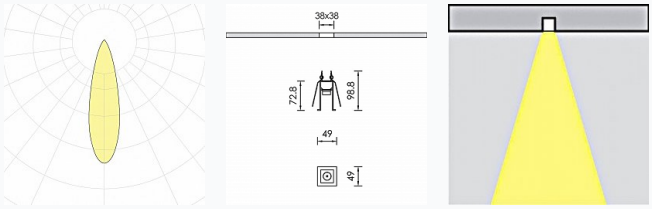


### Safety characteristics

| | |
|---|---|
| IK | 04 |
| IP | 20 |
| Protection Class | Class III |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >60.000h L80B10@35°C |
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |