
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

NOVUS IN BOX 1x H.P.LED



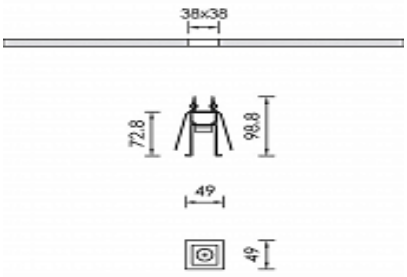

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	DL2864CL003DA
Product family	NOVUS
Diffuser	
Control Gear	Remote Electronic Driver
Width	49
Length	49
Height	98.8


Electrical data

Consumption	1,1
Performance	98.18
Ripple	3
Power Factor	0.96
Nominal Voltage	3

Luminaire Output

Beam Type	UN
Beam	8º
Luminous Flux	108
CRI CCT	927

Light distribution

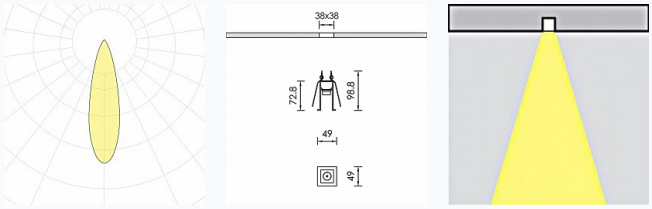

Safety characteristics

IK	04
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%