
NOVUS IN BOX 3x H.P.LED



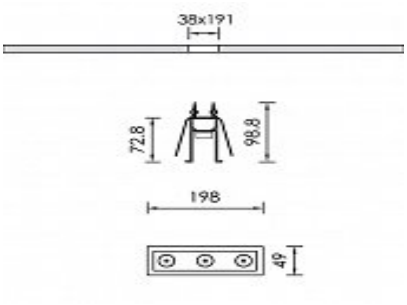

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	DL2920CL001DAC
Product family	NOVUS
Diffuser	
Control Gear	Remote Electronic Driver
Width	49
Length	198
Height	98.8


Electrical data


Consumption	3,3
Performance	110.83
Ripple	3
Power Factor	0.96
Nominal Voltage	9


Luminaire Output

Beam Type	ASY
Beam	-
Luminous Flux	332.5
CRI CCT	930
Glare Indicator Ugr Longwise Optics	11
Glare Indicator Ugr Parallel Optics	18

Light distribution







Safety characteristics

IK	04
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%