
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

STATUS 1F H.P.LED

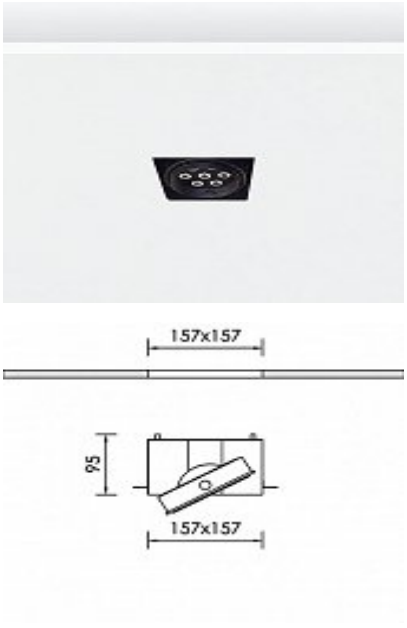

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Μέταλλο, Αλουμίνιο
Product code	DL2985CL001ON
Product family	STATUS
Diffuser	Clear Polycarbonate
Control Gear	Remote Electronic Driver
Width	157
Length	157
Height	95


Electrical data

Consumption	11,7
Performance	97.32
Ripple	3
Power Factor	0.96
Nominal Voltage	21

Luminaire Output

Beam Type	UN
Beam	8º
Luminous Flux	1070.5
CRI CCT	930

Light distribution

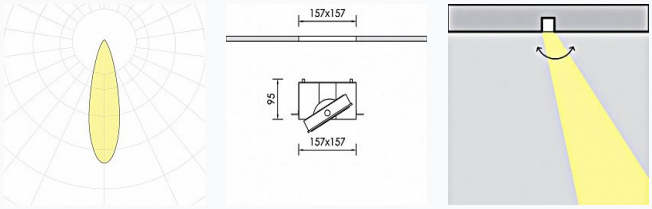

Safety characteristics

IK	07
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%