
STATUS 3F H.P.LED



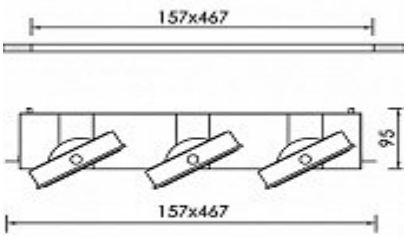

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Μέταλλο, Αλουμίνιο
Product code	DL3125CL003DAC
Product family	STATUS
Diffuser	Clear Polycarbonate
Control Gear	Remote Electronic Driver
Width	157
Length	467
Height	95


Electrical data


Consumption	23,3
Performance	101.07
Ripple	3
Power Factor	0.96
Nominal Voltage	3x21


Luminaire Output

Beam Type	NM
Beam	25º
Luminous Flux	2324.5
CRI CCT	930
Glare Indicator Ugr Longwise Optics	9
Glare Indicator Ugr Parallel Optics	9

Light distribution







Safety characteristics

IK	07
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%