
# STATUS S 2F LED



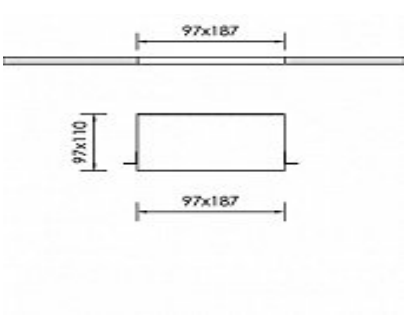


## Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

### General Information

| | |
|---|---|
| Housing | Μέταλλο, Αλουμίνιο |
| Product code | DL3275CL002DA |
| Product family | STATUS |
| Diffuser | |
| Control Gear | |
| Width | 97 |
| Length | 187 |
| Height | 110 |


### Electrical data


| | |
|---|---|
| Consumption | 21,6 |
| Performance | 105.28 |
| Ripple | 3 |
| Power Factor | 0.96 |


### Luminaire Output

| | |
|---|---|
| Beam Type | N |
| Beam | 18º |
| Luminous Flux | 2274 |
| CRI CCT | 940 |
| Glare Indicator Ugr Longwise Optics | 17 |
| Glare Indicator Ugr Parallel Optics | 16 |

### Light distribution





### Safety characteristics

| | |
|---|---|
| IK | 05 |
| IP | 20 |

### Temperature Operating Conditions

| | |
|---|---|
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |