
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

STATUS S 3F LED



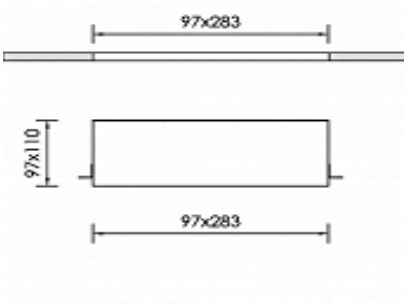

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Μέταλλο, Αλουμίνιο
Product code	DL3336CL002ON
Product family	STATUS
Diffuser	
Control Gear	
Width	97
Length	283
Height	110


Electrical data

Consumption	20,1
Performance	111.23
Ripple	3
Power Factor	0.96

Luminaire Output

Beam Type	N
Beam	18º
Luminous Flux	2169
CRI CCT	930
Glare Indicator Ugr Longwise Optics	15
Glare Indicator Ugr Parallel Optics	14

Light distribution

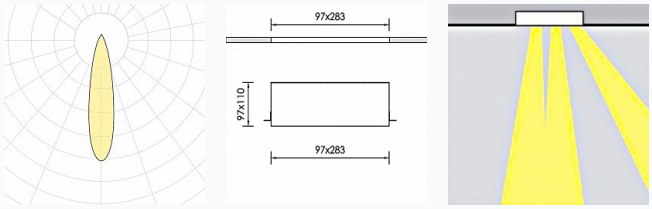

Safety characteristics

IK	05
IP	20

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%