
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

STATUS S 3F LED

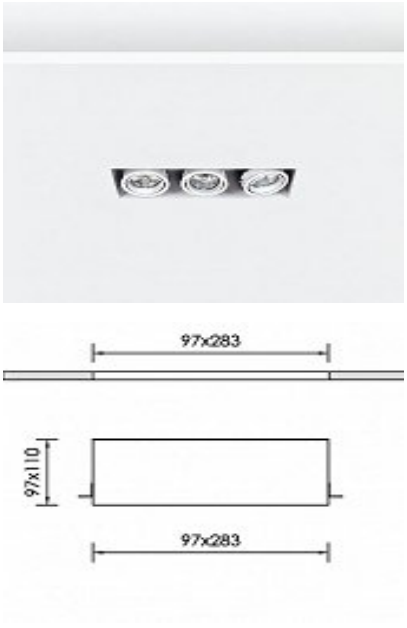

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Μέταλλο, Αλουμίνιο
Product code	DL3371CL001DA
Product family	STATUS
Diffuser	
Control Gear	
Width	97
Length	283
Height	110


Electrical data

Consumption	20,1
Performance	113.73
Ripple	3
Power Factor	0.96

Luminaire Output

Beam Type	M
Beam	36º
Luminous Flux	2286
CRI CCT	940
Glare Indicator Ugr Longwise Optics	18
Glare Indicator Ugr Parallel Optics	17

Light distribution

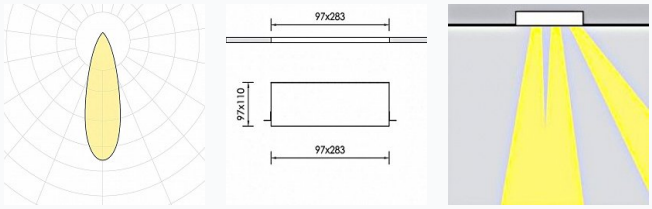

Safety characteristics

IK	05
IP	20

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%