
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

PLANUS 16 LED



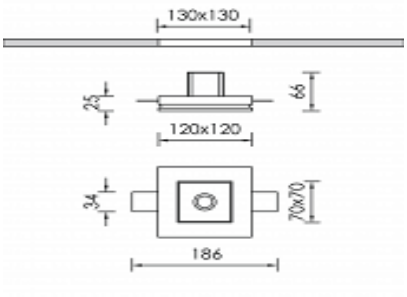

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Plaster
Product code	DL3589DAC
Product family	PLANUS
Diffuser	
Control Gear	Remote Electronic Driver
Width	120
Length	120
Height	66


Electrical data


Consumption	4,2
Performance	61.67
Ripple	3
Power Factor	0.96
Nominal Voltage	12


Luminaire Output

Beam Type	NM
Beam	25º
Luminous Flux	259
CRI CCT	930

Light distribution







Safety characteristics

IK	02
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%