
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

MINI TALUS 3F LED



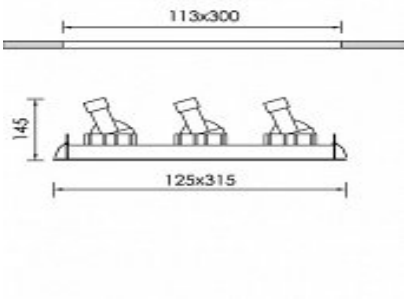

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Metal
Product code	DL3853CL003DA
Product family	TALUS
Diffuser	
Control Gear	Remote Electronic Driver
Width	125
Length	315
Height	145


Electrical data


Consumption	20,1
Performance	111.23
Ripple	3
Power Factor	0.96
Nominal Voltage	3x34,6


Luminaire Output

Beam Type	ASY
Beam	-
Luminous Flux	2169
CRI CCT	930
Glare Indicator Ugr Longwise Optics	16
Glare Indicator Ugr Parallel Optics	22

Light distribution







Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%