
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

MINI TALUS 4F LED



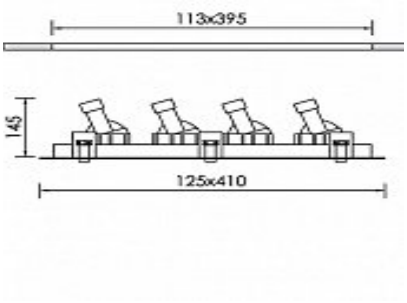

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Metal
Product code	DL3890CL002DAC
Product family	TALUS
Diffuser	
Control Gear	
Width	125
Length	410
Height	145


Electrical data


Consumption	36,8
Performance	104.33
Ripple	3
Power Factor	0.96
Nominal Voltage	4x34,6


Luminaire Output

Beam Type	NM
Beam	24º
Luminous Flux	3756
CRI CCT	930
Glare Indicator Ugr Longwise Optics	16
Glare Indicator Ugr Parallel Optics	15

Light distribution







Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%