
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

MINI TALUS 4F LED



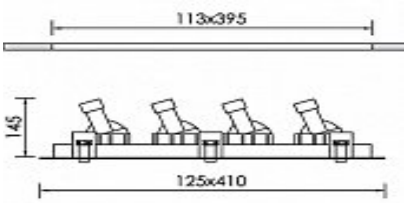

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Metal
Product code	DL3913CL003DAC
Product family	TALUS
Diffuser	
Control Gear	
Width	125
Length	410
Height	145


Electrical data

Consumption	43,2
Performance	105.28
Ripple	3
Power Factor	0.96
Nominal Voltage	4x34,6

Luminaire Output

Beam Type	M
Beam	36º
Luminous Flux	4548
CRI CCT	940
Glare Indicator Ugr Longwise Optics	19
Glare Indicator Ugr Parallel Optics	19

Light distribution

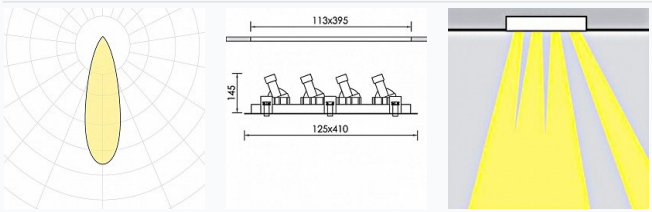

Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%