
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

MINI TALUS 4F LED



Technical drawings

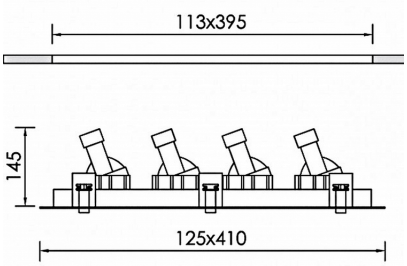

Product Details

CE LM80 LM79 TM21 REACH Source Type COB LED

General Information

Housing	Metal
Product code	DL3935CL001DAC
Product family	TALUS
Diffuser	
Control Gear	
Width	125 mm
Length	410 mm
Height	145 mm


Electrical data

Consumption	24 W
Performance	114 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	4x34,6 V

Luminaire Output

Beam Type	ASY
Beam	-
Luminous Flux	2736 lm
CRI CCT	940
Glare Indicator Ugr Longwise Optics	17
Glare Indicator Ugr Parallel Optics	23

Light distribution

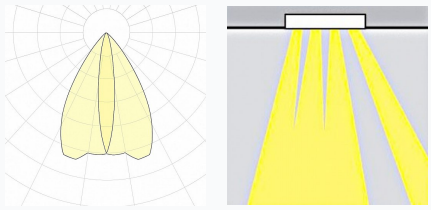

Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%