
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

TALUS M 1F LED



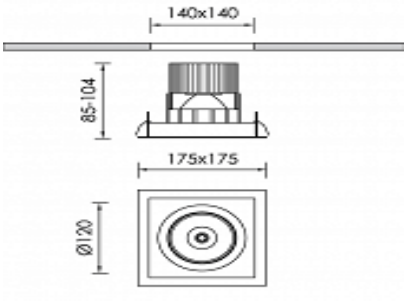

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Metal
Product code	DL4023CL002DAC
Product family	TALUS
Diffuser	Clear Polycarbonate
Control Gear	Remote Electronic Driver
Width	175
Length	175
Height	104


Electrical data


Consumption	31,1
Performance	98.13
Ripple	3
Power Factor	0.96
Nominal Voltage	34,6


Luminaire Output

Beam Type	N
Beam	18º
Luminous Flux	3042
CRI CCT	930

Light distribution







Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%