
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

# TALUS 3F LED



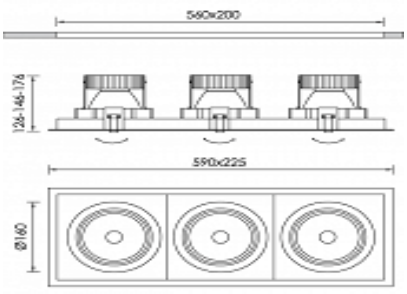


## Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

### General Information

| | |
|---|---|
| Housing | Metal |
| Product code | DL4439CL001DAC |
| Product family | TALUS |
| Diffuser | Clear Polycarbonate |
| Control Gear | Remote Electronic Driver |
| Width | 225 |
| Length | 590 |
| Height | 176 |


### Electrical data


| | |
|---|---|
| Consumption | 38,6 |
| Performance | 115.08 |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 3x34.6 |


### Luminaire Output

| | |
|---|---|
| Beam Type | XW |
| Beam | 60º |
| Luminous Flux | 4373 |
| CRI CCT | 930 |
| Glare Indicator Ugr Longwise Optics | 14 |
| Glare Indicator Ugr Parallel Optics | 13 |

### Light distribution





### Safety characteristics

| | |
|---|---|
| IK | 07 |
| IP | 20 |
| Protection Class | Class III |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >60.000h L80B10@35°C |
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |