
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

MINOR S 3F LED



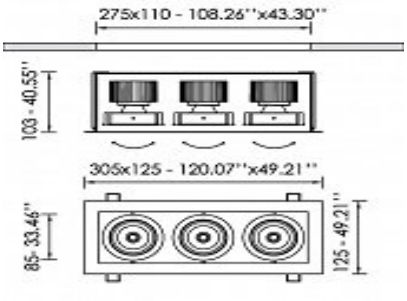

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Metal
Product code	DL4519CL004DAC
Product family	MINOR
Diffuser	Safety Glass Clear
Control Gear	
Width	125
Length	305
Height	103


Electrical data


Consumption	24,9
Performance	110.36
Ripple	3
Power Factor	0.96
Nominal Voltage	3x34.6


Luminaire Output

Beam Type	ASY
Beam	-
Luminous Flux	2748
CRI CCT	940
Glare Indicator Ugr Longwise Optics	16
Glare Indicator Ugr Parallel Optics	22

Light distribution







Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%