
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

MINOR S 1F LED

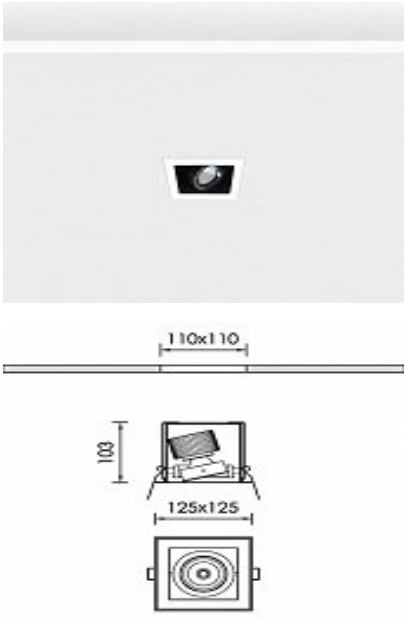

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Metal
Product code	DL4549CL002DA
Product family	MINOR
Diffuser	Safety Glass Clear
Control Gear	
Width	125
Length	125
Height	103


Electrical data

Consumption	8,3
Performance	110.36
Ripple	3
Power Factor	0.96
Nominal Voltage	34.6

Luminaire Output

Beam Type	NM
Beam	24º
Luminous Flux	916
CRI CCT	940

Light distribution

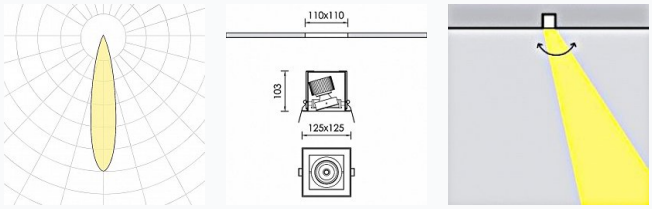

Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%