
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

HONOR M N0 LED



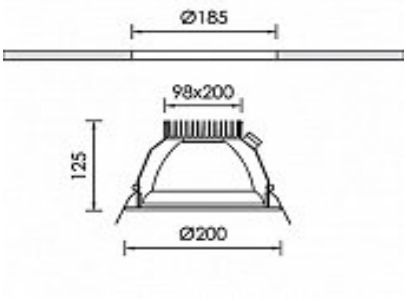

Product Details

CE LM80 LM79 TM21 REACH ENEC

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL5198CL003DAC
Product family	HONOR
Diffuser	Safety Glass Clear
Control Gear	Remote Electronic Driver
Height	125
Diameter	200


Electrical data

Consumption	12,9
Performance	96.67
Ripple	3
Power Factor	0.96
Nominal Voltage	34.6

Luminaire Output

Beam Type	W
Beam	45º
Luminous Flux	1247
CRI CCT	940

Light distribution

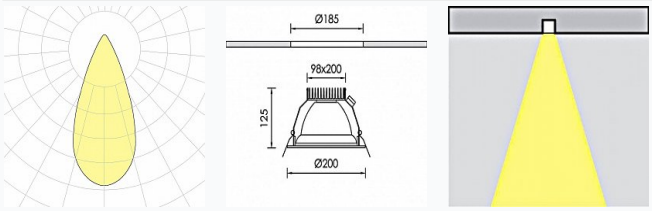

Safety characteristics

IK	04
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%