
# BACKLIGHT PANEL IN PRISMATIC UGR IP65



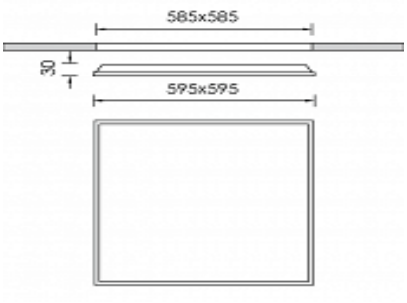


## Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | DL5234CL001DAC |
| Product family | HONOR |
| Diffuser | Prismatic Polycarbonate |
| Control Gear | Remote Electronic Driver |
| Width | 595 |
| Length | 595 |
| Height | 30 |


### Electrical data

| | |
|---|---|
| Consumption | 38 |
| Performance | 114.47 |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 37 |

### Luminaire Output

| | |
|---|---|
| Beam Type | XW |
| Beam | 80º |
| Luminous Flux | 4350 |
| CRI CCT | 930 |
| Glare Indicator Ugr Longwise Optics | 19 |
| Glare Indicator Ugr Parallel Optics | 19 |

### Light distribution

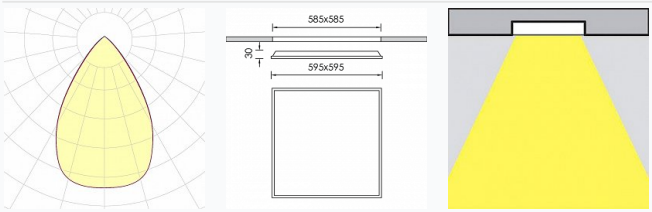


### Safety characteristics

| | |
|---|---|
| IK | 04 |
| IP | 20 |

### Temperature Operating Conditions

| | |
|---|---|
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |