
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

BACKLIGHT PANEL IN 2 PRISMATIC UGR



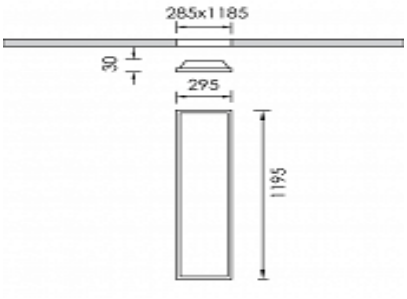

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	DL5239CL001ON
Product family	HONOR
Diffuser	Prismatic Polycarbonate
Control Gear	Remote Electronic Driver
Width	295
Length	1195
Height	30


Electrical data

Consumption	32
Performance	118.75
Ripple	3
Power Factor	0.96
Nominal Voltage	37

Luminaire Output

Beam Type	XW
Beam	80º
Luminous Flux	3800
CRI CCT	940
Glare Indicator Ugr Longwise Optics	19
Glare Indicator Ugr Parallel Optics	19

Light distribution

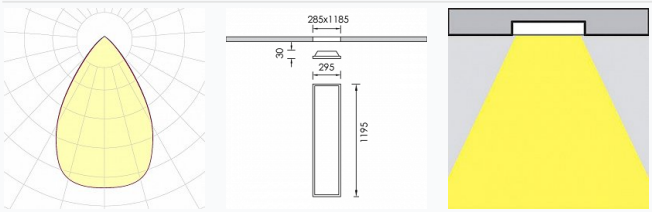

Safety characteristics

IK	04
IP	20

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%