
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

LUSIDUS XS LED



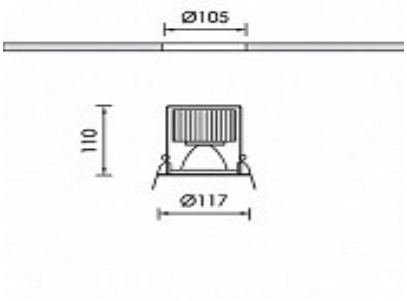

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL5241CL003DAC
Product family	LUSIDUS
Diffuser	Safety Glass Clear
Control Gear	Remote Electronic Driver
Height	110
Diameter	117


Electrical data


Consumption	12,8
Performance	116.64
Ripple	3
Power Factor	0.96
Nominal Voltage	34.6


Luminaire Output

Beam Type	N
Beam	18º
Luminous Flux	1458
CRI CCT	930
Glare Indicator Ugr Longwise Optics	15
Glare Indicator Ugr Parallel Optics	15

Light distribution







Safety characteristics

IK	04
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%