
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

BENE 5F S



Technical drawings

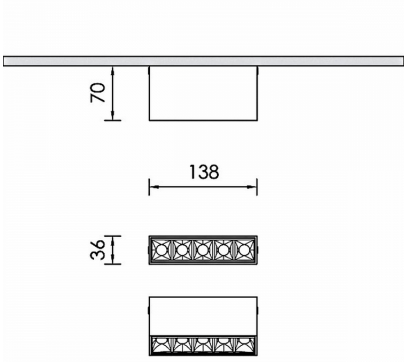

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	CM0116CL003DAC
Product family	BENE
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Width	36 mm
Length	138 mm
Height	70 mm


Electrical data

Consumption	7,6 W
Performance	96.29 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	230 V

Luminaire Output

Beam Type	N
Beam	15º
Luminous Flux	674 lm
CRI CCT	927
Glare Indicator Ugr Longwise Optics	6
Glare Indicator Ugr Parallel Optics	4

Light distribution

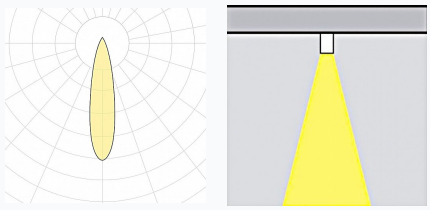

Safety characteristics

IK	04
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%