
BENE 4F ROUND OUT



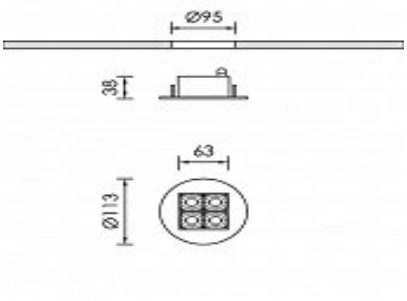

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	CM0154CL002DAC
Product family	BENE
Diffuser	PMMA
Control Gear	Built-in ECG
Height	90
Diameter	120


Electrical data

Consumption	6,2
Performance	89.5
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	M
Beam	30º
Luminous Flux	537
CRI CCT	927
Glare Indicator Ugr Longwise Optics	9
Glare Indicator Ugr Parallel Optics	9

Light distribution

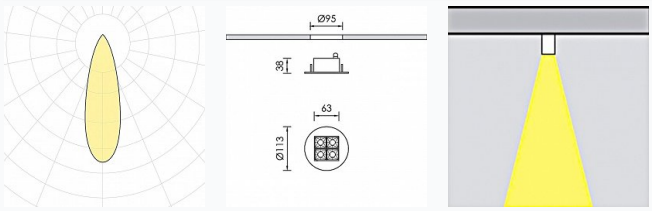

Safety characteristics

IK	04
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%