
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

BENE 4F ROUND OUT



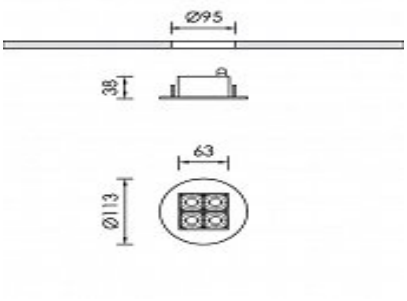

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	CM0161CL001ON
Product family	BENE
Diffuser	PMMA
Control Gear	Built-in ECG
Height	90
Diameter	120


Electrical data

Consumption	4,2
Performance	104.25
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	W
Beam	45º
Luminous Flux	417
CRI CCT	930
Glare Indicator Ugr Longwise Optics	12
Glare Indicator Ugr Parallel Optics	12

Light distribution

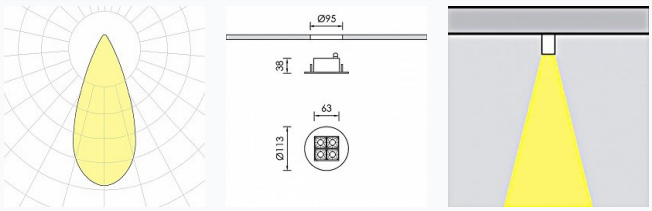

Safety characteristics

IK	04
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%