
BENE 4F ROUND OUT



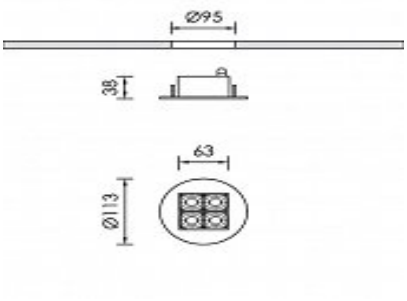

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	CM0162CL001DAC
Product family	BENE
Diffuser	PMMA
Control Gear	Built-in ECG
Height	90
Diameter	120


Electrical data

Consumption	6,2
Performance	96.5
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	W
Beam	45º
Luminous Flux	579
CRI CCT	930
Glare Indicator Ugr Longwise Optics	14
Glare Indicator Ugr Parallel Optics	14

Light distribution

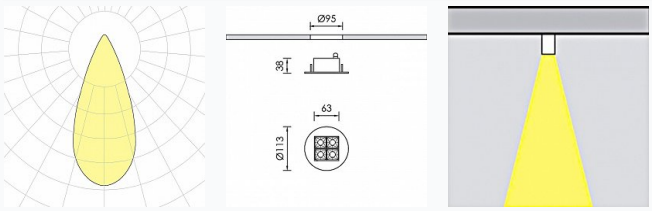

Safety characteristics

IK	04
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%