
LEGATUS SPOT 20 2F



Technical drawings

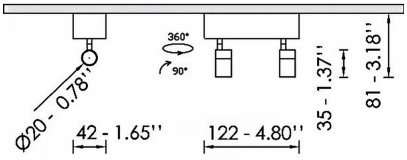

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	CM0179CL002DAC
Product family	LEGATUS
Diffuser	
Control Gear	Built-in ECG
Height	35 mm
Diameter	20 mm


Electrical data


Consumption	3,3 W
Performance	106.67 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	230 V

Luminaire Output

Beam Type	NM
Beam	20
Luminous Flux	320 lm
CRI CCT	927

Light distribution





Safety characteristics

IK	05
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%