
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

CURA



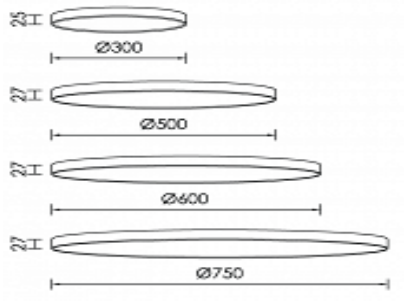

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	ABS
Product code	CM0209CL001DAC
Product family	CURA
Diffuser	PMMA
Control Gear	Built-in ECG
Height	27
Diameter	500


Electrical data


Consumption	40
Performance	117
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	VW
Beam	110º
Luminous Flux	4680
CRI CCT	930
Glare Indicator Ugr Longwise Optics	24
Glare Indicator Ugr Parallel Optics	24

Light distribution







Safety characteristics

IK	03
IP	20
Protection Class	Class I

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%