
VIGOR M OUT



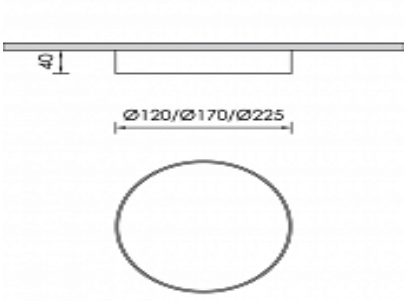

Product Details

CE LM80 LM79 TM21 REACH

Source Type SMD LED

General Information

Housing	Aluminium
Product code	CM0221CL001DAC
Product family	VIGOR
Diffuser	PMMA
Control Gear	Built-in ECG
Height	40
Diameter	170


Electrical data


Consumption	22
Performance	88.18
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	VW
Beam	115º
Luminous Flux	1940
CRI CCT	930
Glare Indicator Ugr Longwise Optics	29
Glare Indicator Ugr Parallel Optics	29

Light distribution







Safety characteristics

IK	05
IP	54
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%