
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VIGOR L OUT



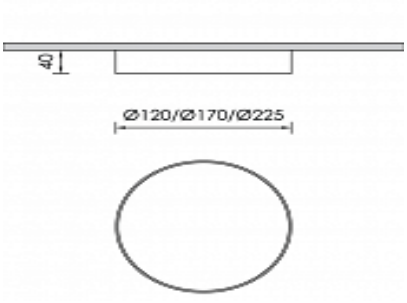

Product Details

CE LM80 LM79 TM21 REACH

Source Type SMD LED

General Information

Housing	Aluminium
Product code	CM0222CL001DA
Product family	VIGOR
Diffuser	PMMA
Control Gear	Built-in ECG
Height	40
Diameter	225


Electrical data


Consumption	28
Performance	93.61
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	VW
Beam	115º
Luminous Flux	2621
CRI CCT	930
Glare Indicator Ugr Longwise Optics	28
Glare Indicator Ugr Parallel Optics	28

Light distribution







Safety characteristics

IK	05
IP	54
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%