
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VIGOR L OUT SQUARE



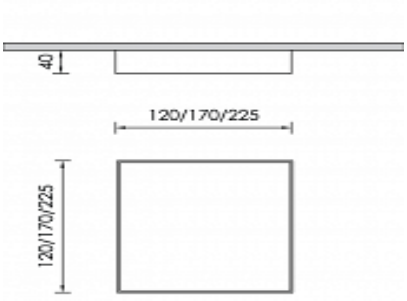

Product Details

CE LM80 LM79 TM21 REACH

Source Type SMD LED

General Information

Housing	Aluminium
Product code	CM0228CL001DAC
Product family	VIGOR
Diffuser	PMMA
Control Gear	Built-in ECG
Width	225
Length	225
Height	40


Electrical data

Consumption	28
Performance	93.61
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	VW
Beam	115º
Luminous Flux	2621
CRI CCT	930
Glare Indicator Ugr Longwise Optics	27
Glare Indicator Ugr Parallel Optics	27

Light distribution

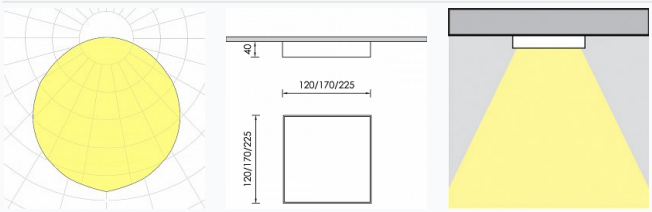

Safety characteristics

IK	05
IP	54
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%