
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

PENDO 2R CEILING LED



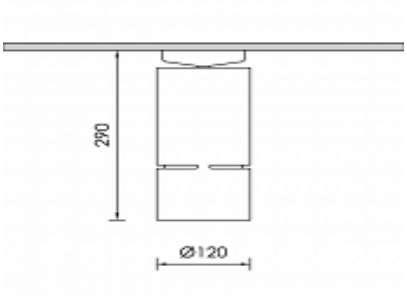

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	CM0380CL001DAC
Product family	PENDO
Diffuser	Clear Polycarbonate
Control Gear	Built-in ECG
Height	290
Diameter	120


Electrical data

Consumption	34,2
Performance	109.91
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	M
Beam	36º
Luminous Flux	3737
CRI CCT	930
Glare Indicator Ugr Longwise Optics	21
Glare Indicator Ugr Parallel Optics	21

Light distribution

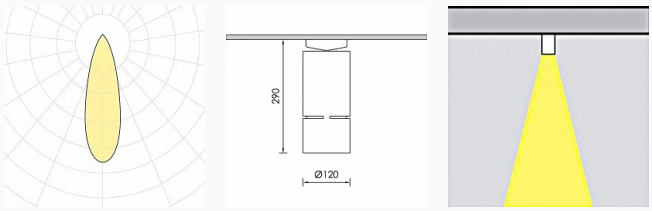

Safety characteristics

IK	07
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%