
FIGO DZ UP DOWN



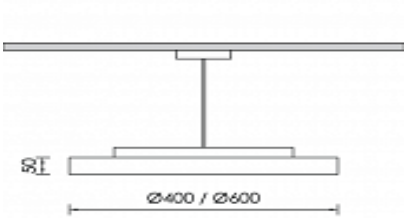

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	CM0425CL002DAC
Product family	FIGO
Diffuser	Microprismatic
Control Gear	Built-in ECG
Height	50
Diameter	400


Electrical data

Consumption	40
Performance	78.4
Ripple	3
Power Factor	0.96

Luminaire Output

Beam Type	VW
Beam	93º
Luminous Flux	3136
CRI CCT	940
Glare Indicator Ugr Longwise Optics	20
Glare Indicator Ugr Parallel Optics	20

Light distribution

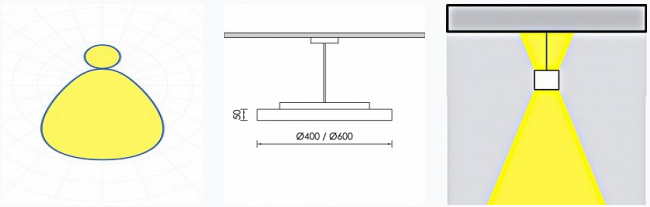

Safety characteristics

IP	40

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%