
FIGO UP DOWN



Technical drawings



Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	CM0429CL001DAC
Product family	FIGO
Diffuser	Microprismatic
Control Gear	Built-in ECG
Height	80 mm
Diameter	400 mm


Electrical data

Consumption	40 W
Performance	78.4 lm/W
Ripple	3
Power Factor	0.96

Luminaire Output

Beam Type	VW
Beam	93º
Luminous Flux	3136 lm
CRI CCT	940
Glare Indicator Ugr Longwise Optics	20
Glare Indicator Ugr Parallel Optics	20

Light distribution

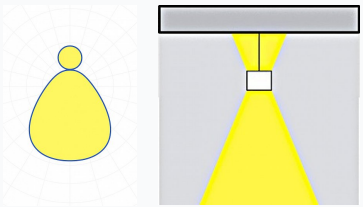

Safety characteristics

IP	40

Temperature Operating Conditions

Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%