
# FIGO UP DOWN






## Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | CM0430CL002DAC |
| Product family | FIGO |
| Diffuser | Microprismatic |
| Control Gear | Built-in ECG |
| Height | 80 |
| Diameter | 600 |


### Electrical data

| | |
|---|---|
| Consumption | 60 |
| Performance | 84.01 |
| Ripple | 3 |
| Power Factor | 0.96 |

### Luminaire Output

| | |
|---|---|
| Beam Type | VW |
| Beam | 93º |
| Luminous Flux | 5040 |
| CRI CCT | 940 |
| Glare Indicator Ugr Longwise Optics | 19 |
| Glare Indicator Ugr Parallel Optics | 19 |

### Light distribution

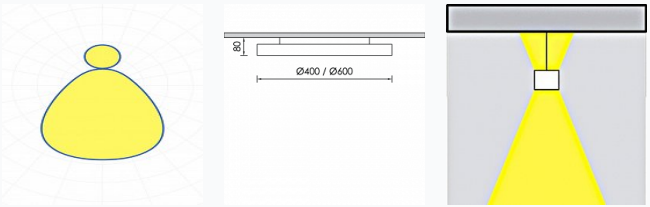


### Safety characteristics

| | |
|---|---|
| IP | 40 |

### Temperature Operating Conditions

| | |
|---|---|
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |