
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

BACKLIGHT PANEL 2 PRISMATIC UGR



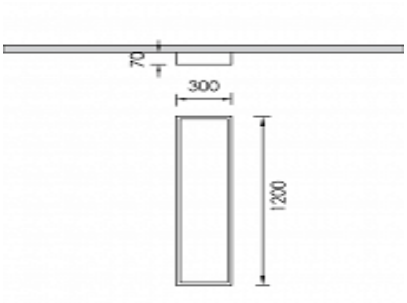

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Metal
Product code	CM0542CL001DA
Product family	PANEL
Diffuser	Prismatic Polycarbonate
Control Gear	Remote Electronic Driver
Width	300
Length	1200
Height	70


Electrical data

Consumption	32
Performance	115.63
Ripple	3
Power Factor	0.96
Nominal Voltage	37

Luminaire Output

Beam Type	XW
Beam	82º
Luminous Flux	3700
CRI CCT	930
Glare Indicator Ugr Longwise Optics	18
Glare Indicator Ugr Parallel Optics	18

Light distribution

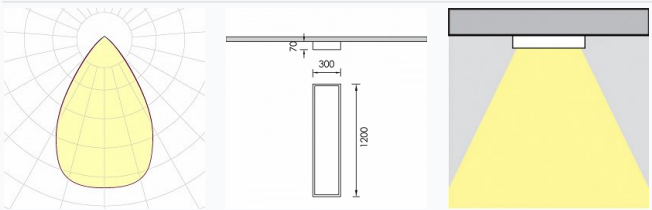

Safety characteristics

IK	04
IP	20
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%