
# BACKLIGHT PANEL 2 PRISMATIC UGR



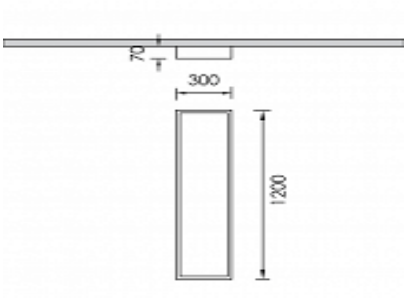


## Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

### General Information

| | |
|---|---|
| Housing | Metal |
| Product code | CM0544CL001DA |
| Product family | PANEL |
| Diffuser | Prismatic Polycarbonate |
| Control Gear | Remote Electronic Driver |
| Width | 300 |
| Length | 1200 |
| Height | 70 |


### Electrical data


| | |
|---|---|
| Consumption | 32 |
| Performance | 118.75 |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 37 |


### Luminaire Output

| | |
|---|---|
| Beam Type | XW |
| Beam | 82º |
| Luminous Flux | 3800 |
| CRI CCT | 940 |
| Glare Indicator Ugr Longwise Optics | 18 |
| Glare Indicator Ugr Parallel Optics | 18 |

### Light distribution





### Safety characteristics

| | |
|---|---|
| IK | 04 |
| IP | 20 |
| Protection Class | Class II |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >50.000h L70B10@35°C |
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |