
FUGA 2 RING SP UP DOWN



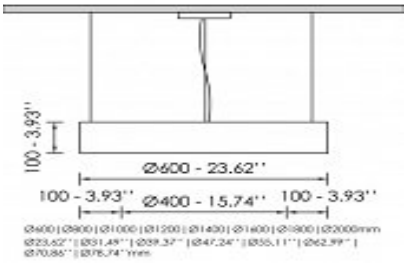

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRS0121CL001DAC
Product family	FUGA
Diffuser	PMMA
Control Gear	Built-in ECG
Height	100
Diameter	1000


Electrical data


Consumption	125,5
Performance	54.11
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	VW
Beam	360º
Luminous Flux	6777
CRI CCT	930
Glare Indicator Ugr Longwise Optics	12
Glare Indicator Ugr Parallel Optics	13

Light distribution







Safety characteristics

IK	04
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	UP: >50.000h L70B10@35°C DOWN:>80.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%